


# BusCard (Revision A) Parallel Printer Port

Looking toward BusCard edge from outside:

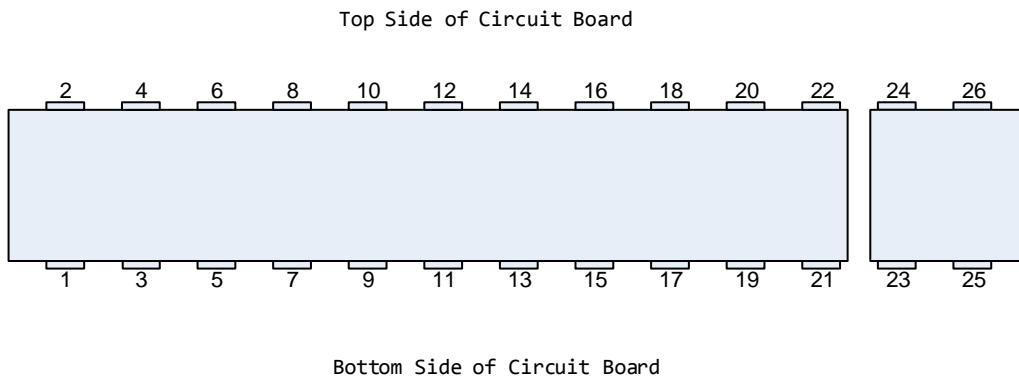

All contacts on top of circuit board are grounded.

Bottom contacts are assigned as follows:

BusCard Parallel  
Port Card Edge

Printer  
Pin #

Contact #	Signal	Pin #
1	-----Strobe-----	1
3	-----Data bit 0-----	2
5	-----Data bit 1-----	3
7	-----Data bit 2-----	4
9	-----Data bit 3-----	5
11	-----Data bit 4-----	6
13	-----Data bit 5-----	7
15	-----Data bit 6-----	8
17	-----Data bit 7-----	9
19	-----N/C-----	10
21	-----Busy-----	11
23	-----N/C-----	12
25	-----N/C-----	13

Contact Properties:

0.05" x 0.35" contacts on a 0.1" (2.54 mm) contact spacing (pitch)  
0.2" (5.08 mm) row spacing

Printed circuit board thickness is 0.062" (1.57 mm)